



<b>Packaging item:</b>	164 x125x300 mm UN gat 42
<b>Content nom:</b>	5000 ml
<b>Date:</b>	1-7-2012

Body construction						
Type	Welded, conical, rectangular					
Material	Tinplate *)					
Tin Coating	E2.0/2.0					
Thickness (mm)	0,23					
Coating inside	Plain					
Coating outside	Plain					
Bottom construction						
Type	Deep stepped profile, seamed on					
Material	Tinplate *)					
Tin Coating	E2.0/2.0					
Thickness (mm)	0,29					
Coating inside	Plain					
Coating outside	Plain					
Compound type	In the double seam					
Top construction						
Type	Plane profile, seamed on, aperture REL 42, drop handle welded on with 2 brackets					
Material	Tinplate *)					
Tin Coating	E2.0/2.0					
Thickness (mm)	0,31					
Coating inside	Plain					
Coating outside	Plain					
Compound type	In the double seam					
Capacities, weights and dimensions						
Height	Mass (g) ± 5% (g)	Nom. volume (ml)	Brimfull volume acc. ISO 90/2 (ml)			
300	410,30	5000	5525			
Packaging						
Can height	Per euro-pallet			Per box		
300	168			14		
Other						
UN mark in bottom	UN/3A1/Y/200/..D/BAM 8496 SLW					

\*) Tinplate according to EN10202.

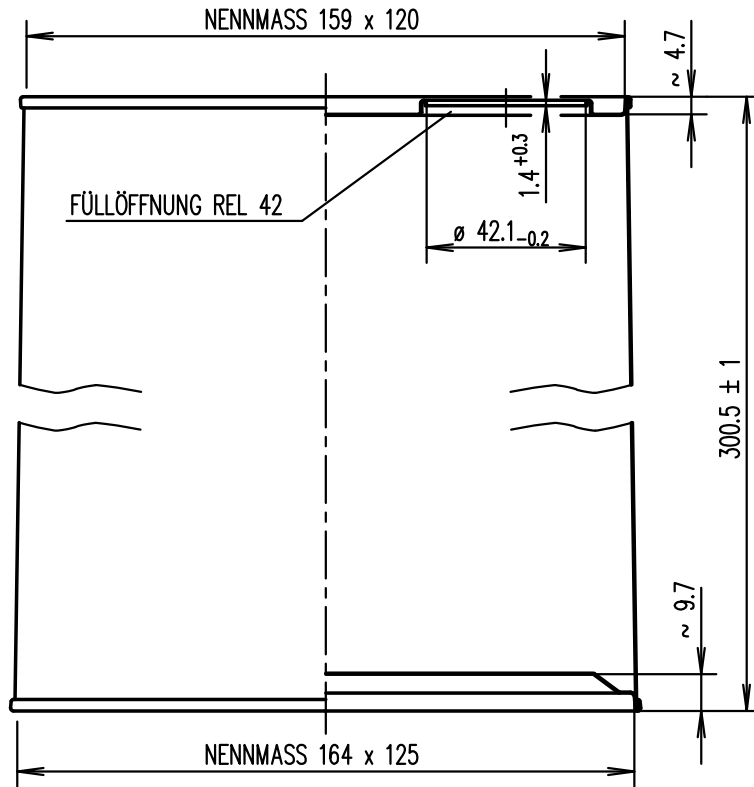

KENNZEICHNUNG:  
UN3A1/Y/200/../  
D/BAM 8496-SLW

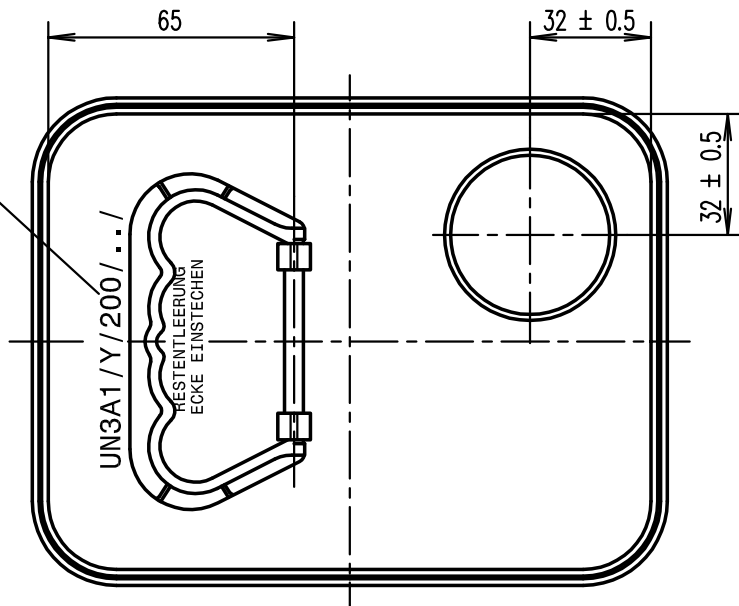

NENNFÜLLVOLUMEN : 5,0 l  
BEHÄLTNISVOLUMEN : 5525 ml